DISPLAY CONTROLLER

CHARACTERISTICS

The display controller handles transfers between the main memory and the CRT. The CRT is a standard 875 line raster-scanned TV monitor, refreshed at 60 fields per second from a bit map in main memory. The CRT contains 606 points horizontally, and 808 points vertically, or 489,648 points total.

The basic way in which information is presented on the display is by fetching a series of words from Alto main memory, and serially extracting bits to become the video signal. Therefore, 38 16-bit words are required to represent each scan line; 30,704 words are required to fill the screen.

HARDWARE


The display controller consists of a sync generator, a data buffer and serializing shift register, and three microcode tasks which control data handling and communicate with the Alto program. The Ram buffer is loaded from the Alto bus for the display word task DWT. The purpose of the intermediate buffer is to synchronize data transfers between the main buffer, which is synchronous with the 170 nsec. master clock, and the shift register, which is clocked with an asynchronous bit clock. The sync generator provides this clock and the vertical and horizontal synchronization signals required by the monitor.


CURSOR

Because of the difficulty of inserting a cursor at the appropriate place in the display bit map at reasonable speed, a hardware cursor is included in the Alto. The cursor consists of an arbitrary 16 by 16 bit patch, which is merged with the video at the appropriate time. The coordinate origin for the cursor is the upper left hand corner of the screen. The cursor presentation is unaffected by changes in display resolution.


The cursor hardware consists of a 16-bit shift register which holds the information to be displayed on the current scan line, and a counter which is incremented by the bit clock, and determines the x coordinate and bit map segment from the R memory into the hardware.

DISPLAY CONTROL MODULE

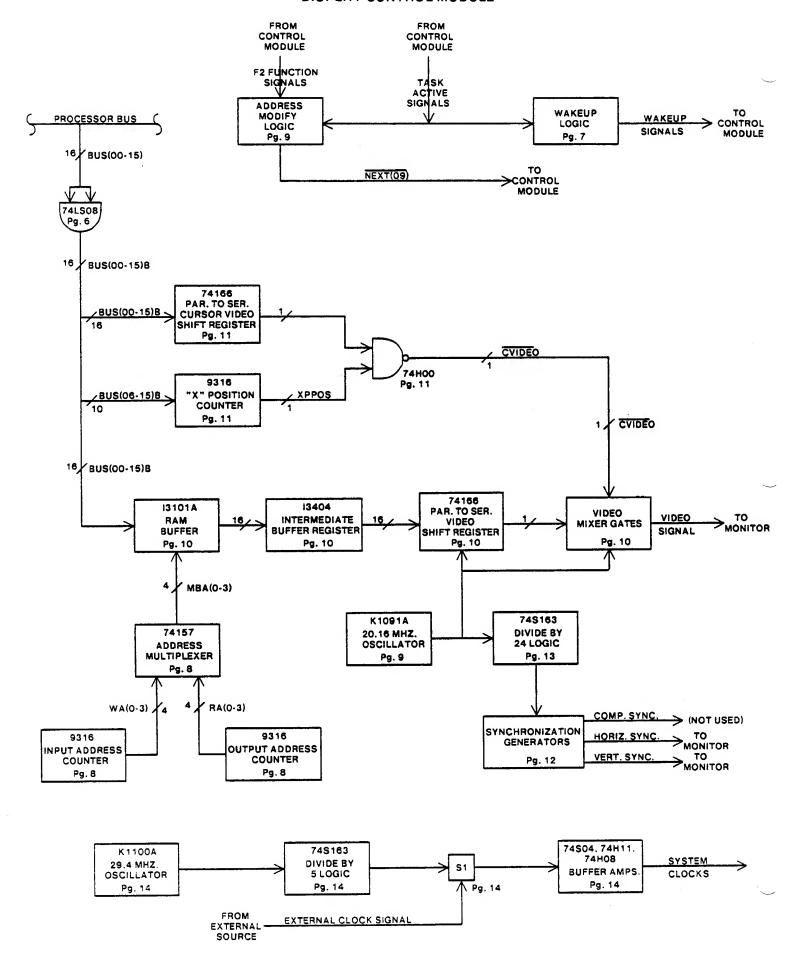

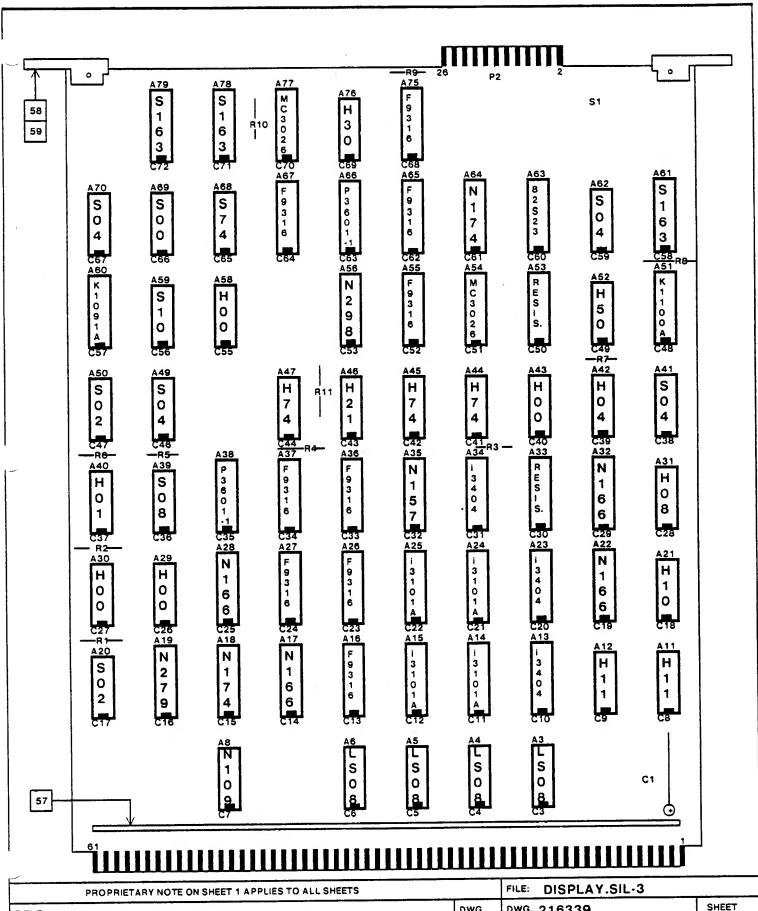



PROPRIETARY NOTE ON SHEET 1 APPLIES TO AL	L SHEETS	FILE: DISPLAY.SIL-3	
ASSEMBLY, PRINTED WIRING DISPLAY CONTROL MODULE		DWG. 216339 NO. SHEET 3 OF 14	SHEET REV.

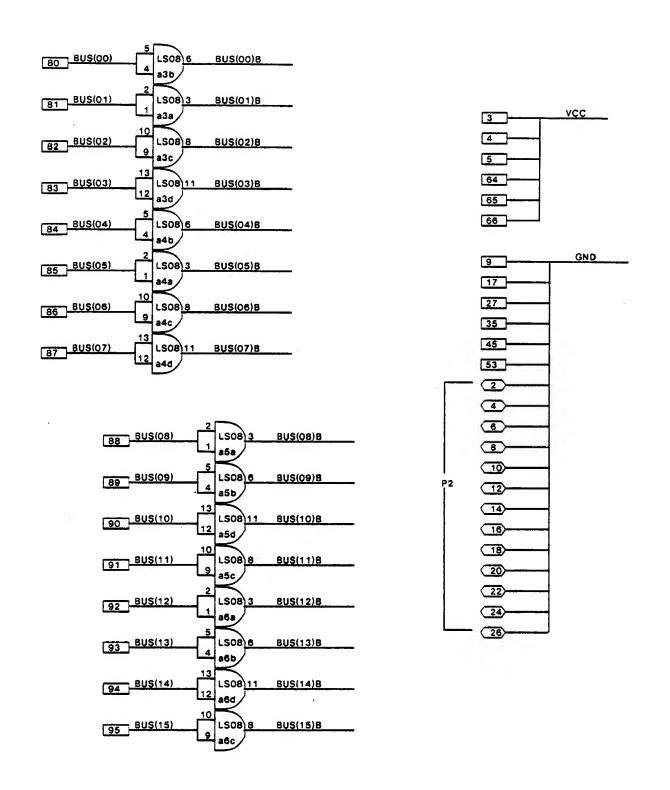


Bus Buffers

XEROX	Project	ASSEMBLY, P.W	File	Designer	Rev	Date	Page
SPG	ALTO2	DISPLAY CONTROL	DISPLAY.SIL-6	FREEMAN	G	11/7/80	6

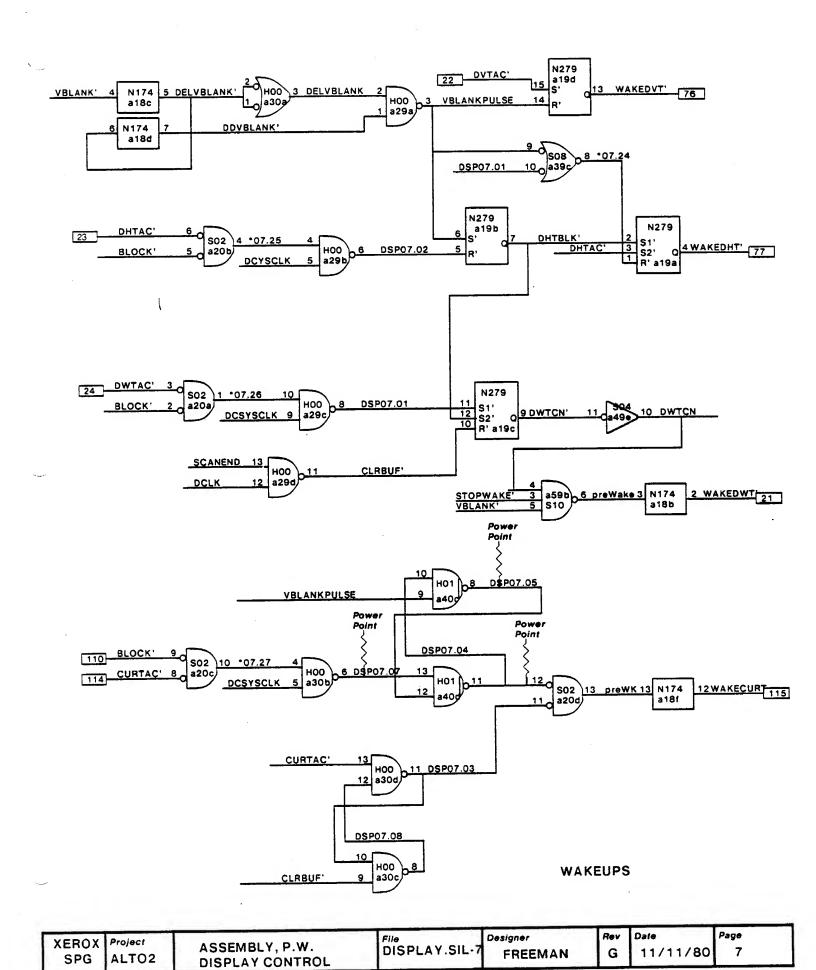

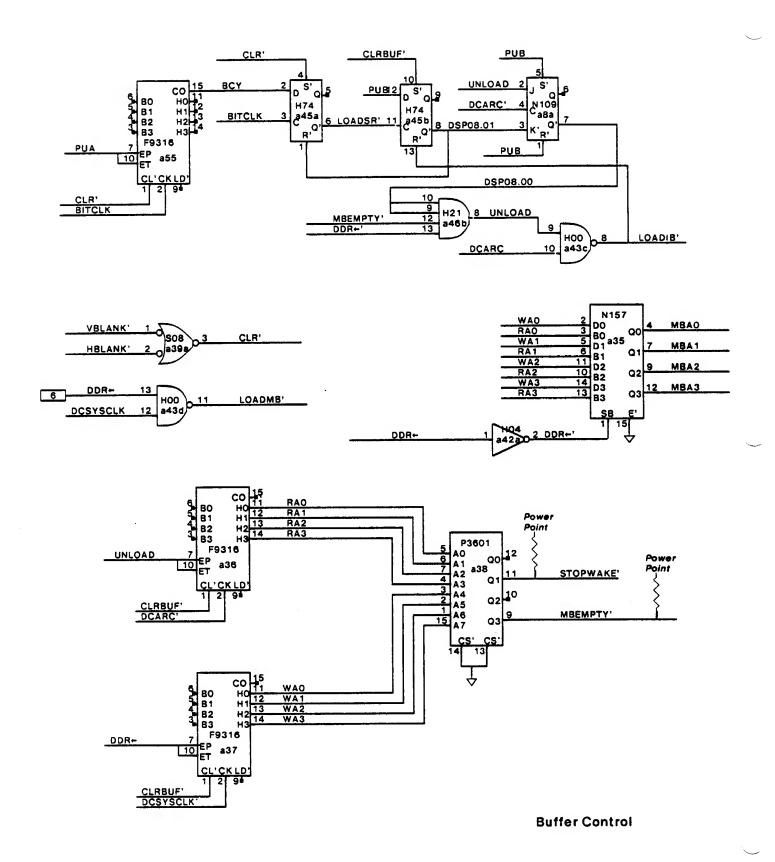



XEROX	Project	ASSEMBLY, P.W	File	Designer	Rev	Date	Page
	ALTO2	DISPLAY CONTROL	DISPLAY.SIL-8	FREEMAN	G	11/11/80	8

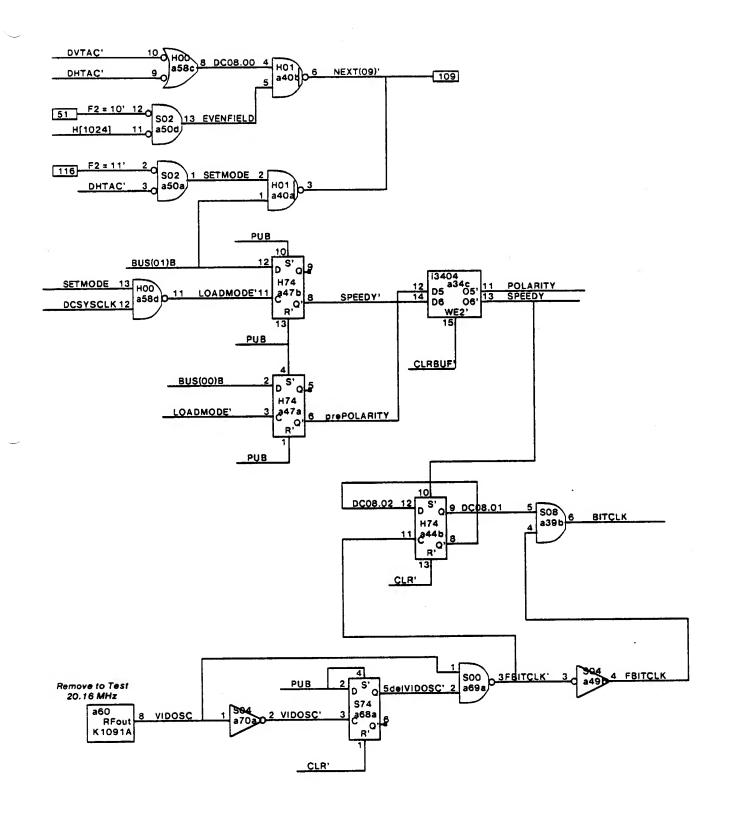

Video Bit Clock


XEROX	Project	ASSEMBLY, P.W	File	Designer	Rev	Date	Page
SPG	ALTO2	·	DISPLAY.SIL-9	FREEMAN	IG	11/11/80	9
SPG	ALIUZ	DISPLAY CONTROL					<u> </u>

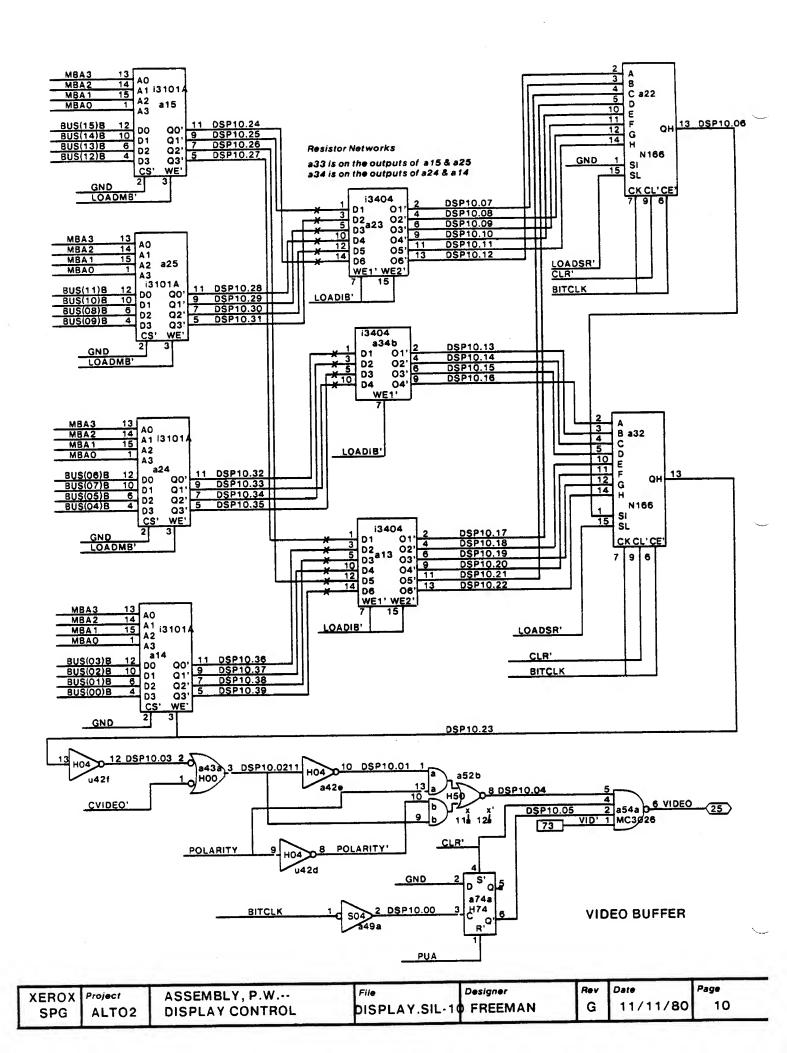


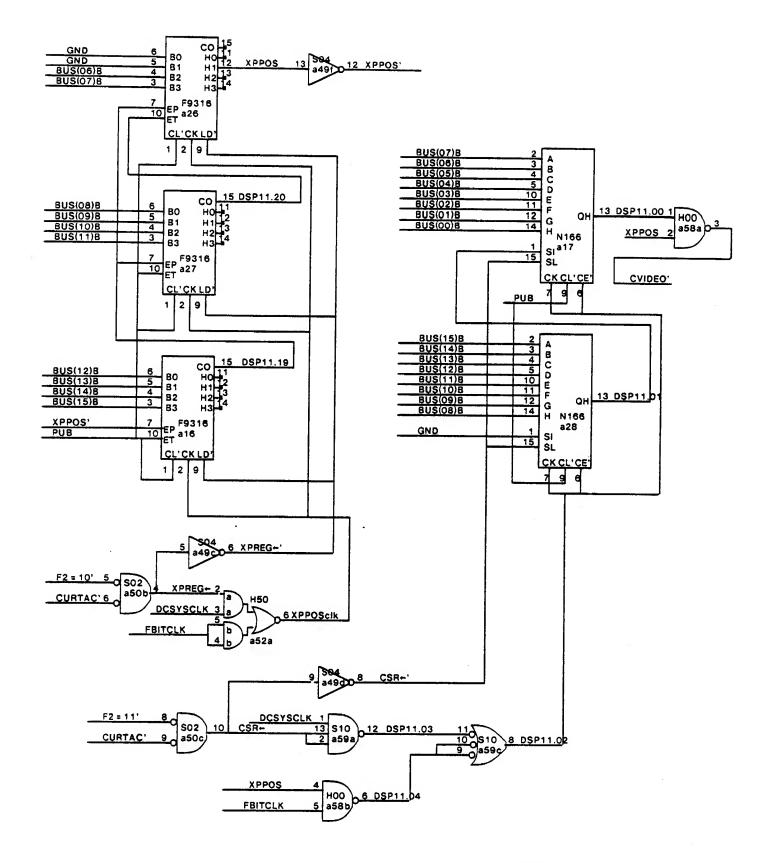

CURSOR


XEROX	Project	ASSEMBLY, P.W	File	Designer	Rev	Date	Page
SPG	ALTO2	DISPLAY CONTROL	DISPLAY.SIL.	1 FREEMAN	G	11/11/80	11

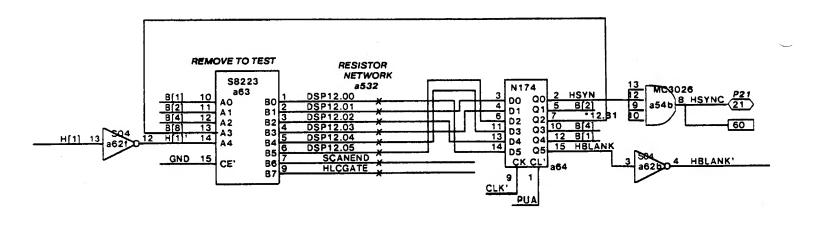

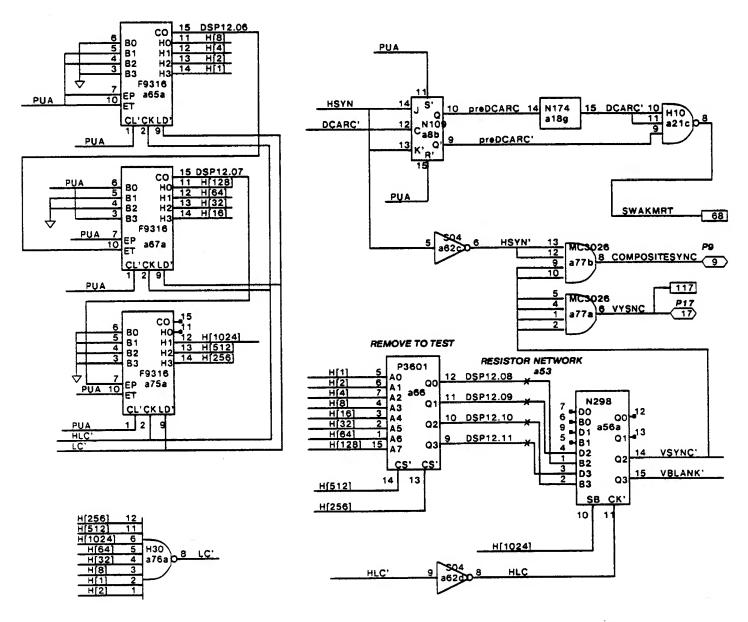


SYNC GENERATOR 875 LINE

XEROX Project SPG ALTO2	ASSEMBLY, P.W DISPLAY CONTROL	File DISPLAY.SIL-12	Designer FREELMAN	Rev	Date 11/11/80	Page 12	
-------------------------	-------------------------------	------------------------	----------------------	-----	---------------	------------	--

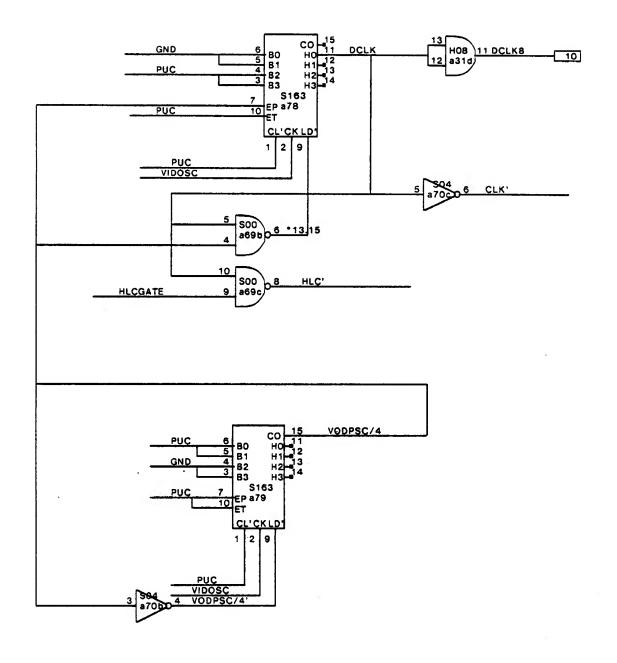


						·	
XEROX	Project	ASSEMBLY, P.W	File	Designer	Rev	Date	Pag e
ŞPG	ALTO2	DISPLAY CONTROL	DISPLAY.SIL-1	FREEMAN	G	11/7/80	13

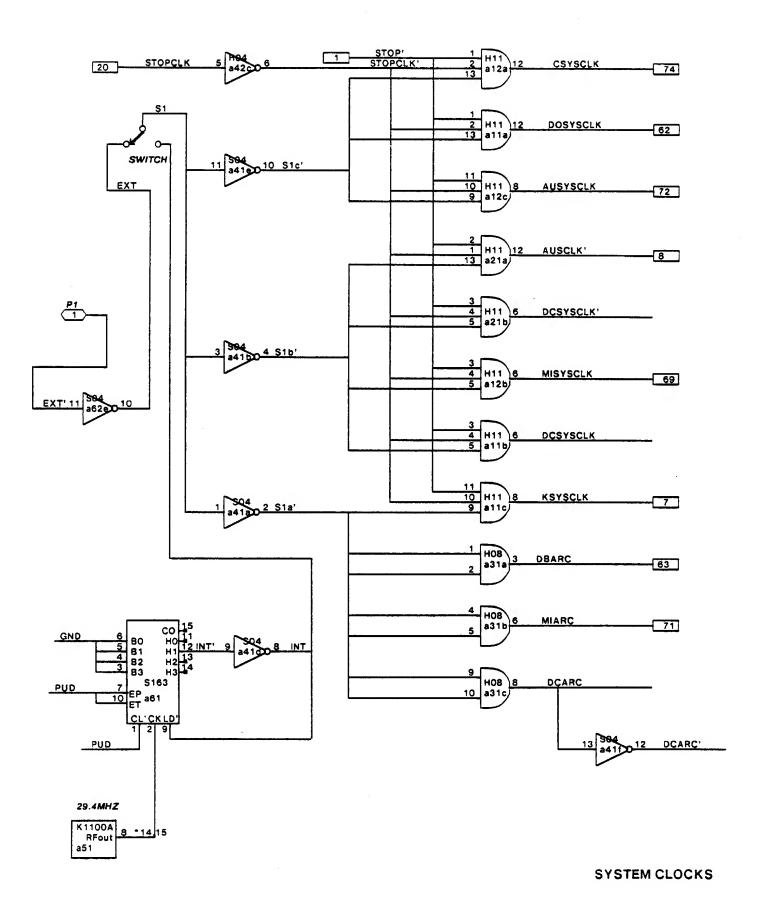

XEROX	Project	ASSEMBLY P.W.	File	Designer	Rev	Date	Page
SPG	ALTO2	DISPLAY CONTROL	DISPLAY.SIL-	4 FREEMAN	G	11/11/80	14

	Xerox Corporation Et Segundo, California 216412
	ALTO II ASSEMBLY, CABLE -
	11the 3
	able bycylated.
2 8 8 9 9 10 11 12	14 15 16 17 18 19 20 21 22 22 24 24 24 25 J1 - 26 J1 - 26 J1 - 26 1. Ref New York and Applicable Material List. 2. Ref Designation With:
	
10 22 9 · 21 · 21 8	19 6 6 18 18 5 5 7 17 4 4 4 4 4 4 4 7 16 15 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
	tho d
}	

(77, 13)

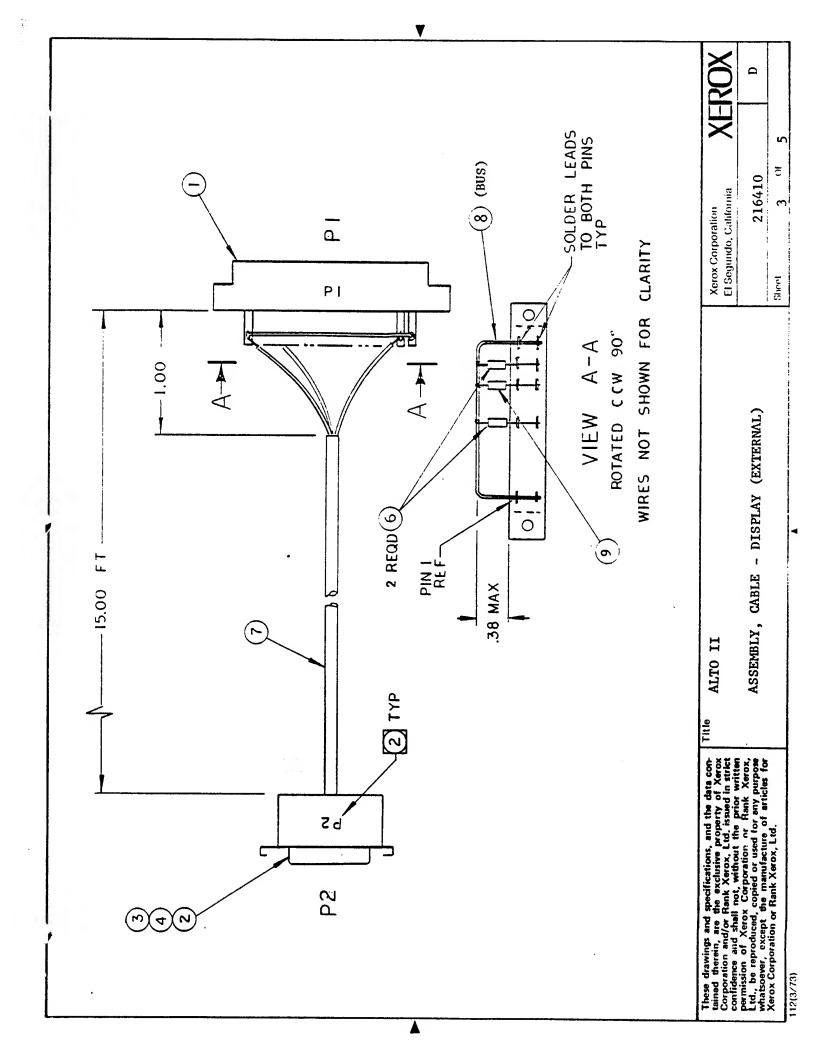

													V									XEROX			
			HORIZONTAL SYNC	VIDEO	VERTICAL SYNC	HORIZONTAL SYNC		VIDEO	A PROPERTY OF THE PROPERTY OF	VERTICAL SYNC	,											 Xerox Corporation			
						TWISTED	PAIR-	TWISTED	PAIR	TWISTED	PAIR	1					:		:		i				- DISPLAY
						WHT	BLK J	GRN	BLK J	RED ,	BLK)			: :					t	1		 1 11	11 (11	ALIO II ASSEMBLY, CABLE
∞	8	8	9	6	9	7					7				-			-				Title	TT OTTW	ALLIA	ASSEME
								1						İ							i	able			bbreviated.
P] - 1	10	1	BUS	BUS	P1 - BUS	P2 - 16	3	14	1	18	P2 - 5											1. Ref Item No's in Applicable	Material List	Material List.	Material List. 2. Ref Designations Are Abbreviated.
P1 - A	1	10	9	8	6	Ŧ	BUS	J	BUS	×	P1 - BUS												_		
<u> </u>										-	P					-						d specifications, an	THE EXCINSIVE PACE	The exclusive prop Rank Xerox, Ltd.	Corporation and/or Rank Xerox, Ltd. issued in strict confidence and shall not, without the prior written permission of Xerox Connection of Xerox Connection
_ -	2	3	4	2	9	7	8	6	10	11	12											hese drawings and	Miles tireicin, are	orporation and/or	orporation and/or onfidence and shanniesion of Xer.

NOTES: UNLESS OTHERWISE SPECIFIED

- ASSEMBLE PER MODULE ASSEMBLY SPEC, DWG NO. 216207.
- MAY BE PURCHASED FROM STANDARD WIRE & CABLE COMPANY, EL SEGUNDO, CALIFORNIA. (2) VENDOR PART NO.
- MAY BE PURCHASED FROM CTS CORPORATION, ELKHART, INDIANA. VENDOR PART NUMBER US104L.
- MAY BE PURCHASED FROM ROGAN CORPORATION, NORTHBROOK, ILLINOIS. VENDOR PART NUMBER SC-10, BLACK, .140" x .093".
- AFTER SOLDERING, TRIM "R1" RESISTOR LEADS ON ETCH SIDE AS CLOSE TO THE (5) PRINTED WIRING BOARD AS POSSIBLE AND ADHERE APPROX 1.0" LENGTH OF TEFLON TAPE (ITEM 11) OVER TRIMMED LEADS.
- TAG LOOSE ENDS OF CABLE AS TO THEIR DESTINATIONS PER WIRE LIST.
- INSTALL ITEM 4 TO ITEM 3 USING SUITABLE ADHESIVE.

		WIRE LIST		
WIRE NO.	FROM	TO 6	WIRE TYPE	NOTES
1	PWB - 1	J1 - PIN C	9	YELLOW
2	PWB - 2	J1 - PIN D	8	BLUE
3	PWB - 3	J1 - PIN B	7	ORANGE


case drawings and specifications, and the data considered therein, are the exclusive property of Xerox Corporation and/or Rank Xerox, Ltd. issued in strict confidence and shall not without the prior written permission of Xerox Corporation or Rank Xerox, Ltd., be reproduced, copied or used for any purpose whatsoever, except the manufacture of articles for Xerox Corporation or Rank Xerox, Ltd.

ASSEMBLY, PRINTED WIRING DISPLAY INTENSITY CONT.


Xerox Corporation El Segundo, California 216583

Sheet

A

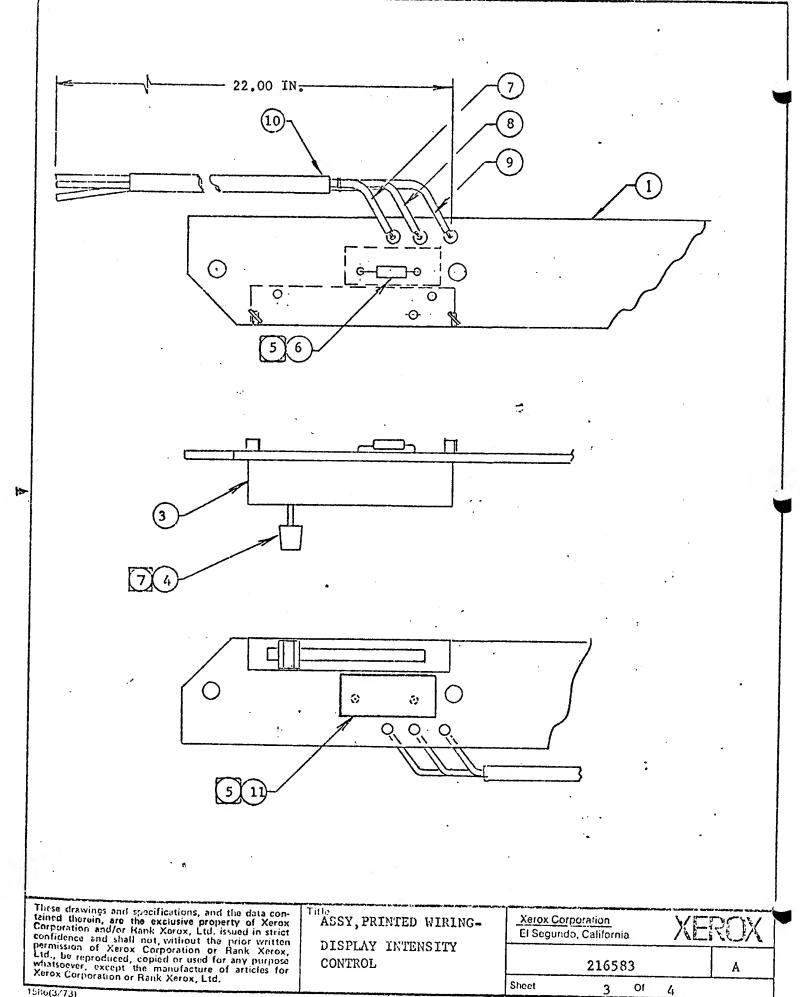

1586(3/73)

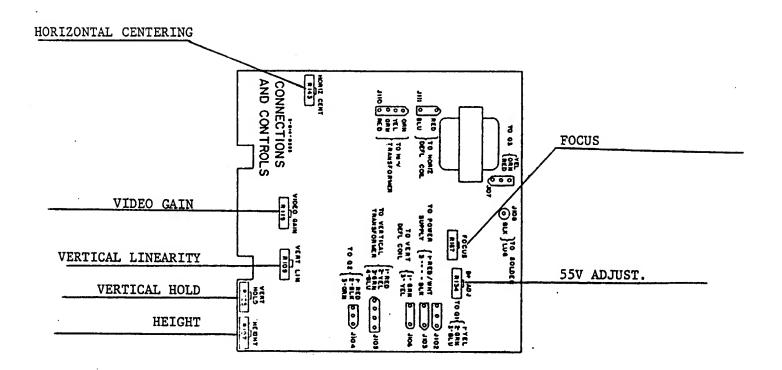

DISPLAY ASSEMBLY PCB
AS VIEWED FROM FRONT
OF DISPLAY